

INTERFER
www.interfer.pt



MAXI

FAST INSTALLATION – AND A SOFT LIFT

KESSEBÖHMER

Opening angle	Carcase height (mm)	Fixing bracket for the front	**Model A Grey** Product code	**Model B Beige** Product code	**Model C Ice white** Product code	**Model D Black** Product code
		for flat headed screws PU: 25 sets	**271710 0006** nickel-plated	**271713 0006** nickel-plated	**271721 0006** nickel-plated	**271720 0006** nickel-plated
		for euro screws PU: 25 sets	**271707 0006** nickel-plated	**271711 0006** nickel-plated	**271714 0006** nickel-plated	**271722 0006** nickel-plated
 **75°**	300		3,8–7,1 kg	6,7–13,7 kg	11,9–21,0 kg	15,4–27,3 kg
	400		2,8–5,3 kg	5,0–10,3 kg	8,9–15,8 kg	11,6–20,5 kg
	500		2,3–4,3 kg	4,1–8,3 kg	7,2–12,5 kg	9,4–16,2 kg
	600		1,9–3,5 kg	3,3–7,0 kg	5,9–10,6 kg	7,6–13,7 kg
	700		1,6–3,0 kg	2,8–5,7 kg	5,0–8,8 kg	6,5–11,4 kg
	800		1,4–2,7 kg	2,5–5,1 kg	4,4–7,9 kg	5,7–10,4 kg
	900		1,3–2,4 kg	2,2–4,6 kg	4,0–7,0 kg	5,2–9,1 kg
	1.000		1,1–2,1 kg	2,0–4,1 kg	3,6–6,3 kg	4,6–8,2 kg

Front weights per 1x fitting; for carcases wider than 600 mm 2x fitting

 **90°**	300		3,0–5,3 kg	5,1–10,2 kg	9,1–15,8 kg	11,9–20,8 kg
	400		2,3–4,0 kg	3,8–7,6 kg	6,9–11,9 kg	8,9–15,6 kg
	500		1,8–3,2 kg	3,1–6,1 kg	5,5–9,6 kg	7,2–12,5 kg
	600		1,5–2,7 kg	2,6–5,1 kg	4,6–7,9 kg	6,0–10,4 kg
	700		1,3–2,2 kg	2,1–4,2 kg	3,8–6,6 kg	4,9–8,7 kg
	800		1,1–2,0 kg	1,9–3,9 kg	3,4–5,9 kg	4,4–7,8 kg
	900		1,0–1,8 kg	1,7–3,4 kg	3,0–5,2 kg	3,9–6,9 kg
	1.000		0,9–1,6 kg	1,5–3,0 kg	2,7–4,7 kg	3,6–6,2 kg

Front weights per 1x fitting; for carcases wider than 600 mm 2x fitting

 **110°**	300		2,4–4,0 kg	3,9–7,5 kg	6,8–11,6 kg	9,2–15,0 kg
	400		1,8–3,0 kg	2,9–5,6 kg	5,1–8,7 kg	6,9–11,2 kg
	500		1,4–2,4 kg	2,4–4,5 kg	4,0–7,1 kg	5,7–9,0 kg
	600		1,2–2,0 kg	1,9–3,8 kg	3,3–5,9 kg	4,5–7,6 kg
	700		1,0–1,7 kg	1,7–3,1 kg	2,9–4,8 kg	3,8–6,2 kg
	800		0,9–1,4 kg	1,4–2,8 kg	2,6–4,3 kg	3,4–5,6 kg
	900		0,8–1,3 kg	1,3–2,5 kg	2,3–3,8 kg	3,0–5,0 kg
	1.000		0,7–1,2kg	1,1–2,2 kg	2,0–3,5 kg	2,7–4,5 kg


Front weights per 1x fitting; for carcases wider than 600 mm 2x fitting

Fixing bracket for the carcase:
37 mm hole distance

Set consists of:
1 fitting
1 fixing bracket for the carcase
1 fixing bracket for the front



Fig.: 90° Opening angle
(Dimensions in mm)

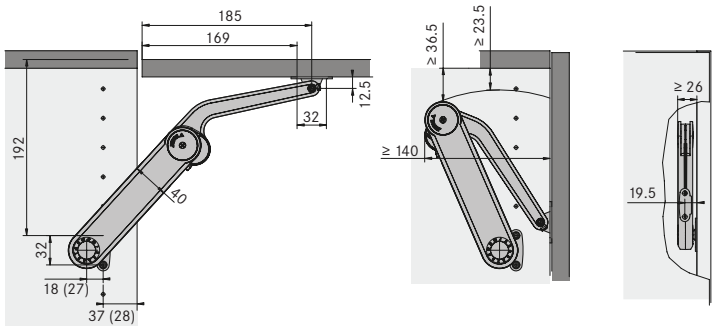

View left carcase side
(lifter installed right)

Front view